

LEDWPC30W

30 Watt LED Area Light

Project:	
Type:	
Catalog #:	

STANDARD



The LEDWPC30W is a contemporary, commercial-grade area luminaire, which can be wall-, ground- or pole-mounted to provide outdoor perimeter, area, and floodlighting. With a die cast aluminum housing and a tempered glass lens, the LEDWPC30W will stand up to many years of punishing environmental conditions. High-efficacy, long-life LEDs provide both energy and maintenance cost savings compared to traditional, HID area lights.

FEATURES

- Available in 4000k (neutral white) and 5000k (cool white) color temperatures.*
- Long-life LEDs provide 79,000 hours of operation with at least 70% of initial lumen output (L_{70}).**
- LEDWPC30W delivers 2,688 lumens and 90 LPW at both 4000k and 5000k.*
- Universal 120-277 AC voltage (50-60Hz) is standard.
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- Color rendering index > 80.
- Die cast aluminum housing with durable, dark bronze, powder coat paint.
- Tempered glass lens.
- Removable, threaded plugs for side attachment of 1/2" rigid electrical conduit, or for button photocells.
- Easy installation in new construction or retrofit.

* Contact factory for other color temperatures and lumen packages.

** L_{70} hours are IES TM-21-11 calculated hours.



WARRANTY & LISTINGS

- cULus listed for wet locations (-20°C to 40°C / -4°F to 104°F)
- IP65 rated.
- DLC approved.
- Tested and approved to UL1598, UL8750 and IEC60598 safety standards.
- 5-year warranty on all electronics and housing.

MOUNTING OPTIONS

- Wall-mount plate is standard.
- Trunnion-mount option provides secure attachment to flat surfaces.
- Die-cast knuckle-mount option is installed on a junction box. Includes 1/2" NPS stem with locking nut.




Trunnion Mount
(LEDWPC-TM)



Knuckle Mount
(LEDWPC-KM)

DIMENSIONS

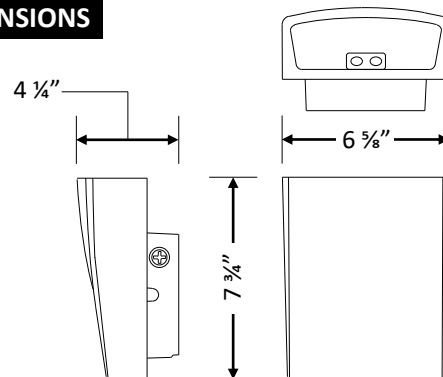

ORDERING INFORMATION

Example: LEDWPC30W-4K + LEDWPC-TM

Model	Luminaire Watts	Luminaire Lumens	Lumens Per Watt	Color Temperature	Mounting Options (Order Separately)
LEDWPC30W-4K	30	2,688	90	4K = 4000k	Trunnion Mount — LEDWPC-TM
LEDWPC30W-5K	30	2,688	90	5K = 5000k	Knuckle Mount — LEDWPC-KM

LEDWPC30W

30 Watt LED Area Light

ELECTRICAL

Model	Color Temperature	CRI ¹	Luminaire Lumens	Luminaire Watts	Lumens Per Watt	Input Voltage	Input Current (A)			Power Factor	THD ²	L ₇₀ Hours ³
							120V	240V	277V			
LEDWPC30W-4K	4000k	> 80	2,688	30	90	120-277 (50-60Hz)	0.25	0.13	0.11	> 90%	< 20%	79,000
LEDWPC30W-5K	5000k	> 80	2,688	30	90	120-277 (50-60Hz)	0.25	0.13	0.11	> 90%	< 20%	79,000


¹ Color rendering index

² Total harmonic distortion

³ L₇₀ refers to the number of hours at which lumen output declines to 70% of the initial level. L₇₀ hours are IES TM-21-11 calculated hours.

PHOTOMETRIC DATA

LEDWPC30W-4K (2,688 Lumens)

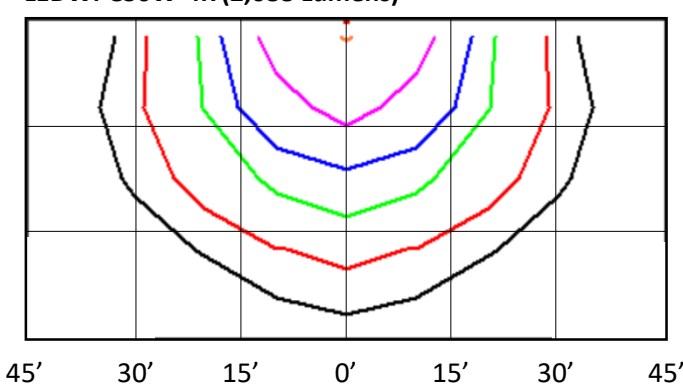

Foot Candles
5.0
2.0
1.0
0.5
0.2
0.1

Notes:

- Isofootcandle plots depict initial footcandles at grade.
- Gridlines represent units of mounting height of 15 feet.

0'

15'

30'

45'

Luminaire Orientation:



BUG Rating: B1-U1-G0

Zone	Lumens	%
FL - Front - Low (0-30)	513	19%
FM - Front - Medium (30-60)	1,103	41%
FH - Front - High (60-80)	301	11%
FVH - Front - Very High (80-90)	1	0%
Total Forward Light	1,919	71%
BL - Back - Low (0-30)	399	15%
BM - Back - Medium (30-60)	341	13%
BH - Back - High (60-80)	27	1%
BVH - Back - Very High (80-90)	1	0%
Total Back Light	767	29%
UL - Up Light - Low (90-100)	0	0%
UH - Up Light - High (100-180)	2	0%
Total Up Light	2	0%
Total Lumens	2,688	100%